
Universal. Robust. Precise. Fast. Laser Receiver **STRUCTOR** Twice as good.

Universal Laser Receiver Structor STR-50R for red Rotation- and Line Lasers



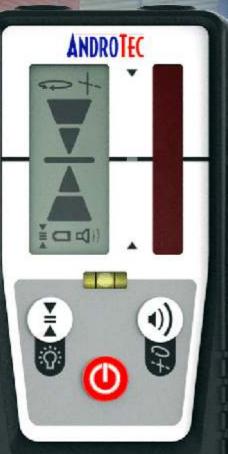

4-11kHz

Pulse Line

Display

2x

AA

1x



620-800

nm

Wavelength





上ED's

 $(\langle \langle \rangle$

> 50 h



......

IP67

Premium Laser Receiver. Made in Germany.

Development, production and distribution:

AndroTec GmbH Hauptstraße 186 D-67714 Waldfischbach-Burgalben Tel. +49 (0) 6333 27 55-0, Fax -22 info@androtec.com, www.androtec.com





Absolutely secure: Rugged Clamp

5

4

3

2

5

6 7 8

9

10

Technical Specifications Structor STR-50R

ANDROTEC

-))

× II 4

Range with rotating lasers	Up to 400m (radius)
Range with line lasers	Up to 100m (only pulsed laser lines)
Capture height	45mm
Reception angle	±45°
Wavelength	620nm to 800nm
Pulse frequency of line laser	4kHz to 11kHz
Accuracy	±0,2mm / ±1mm / ±2mm / ±3mm
First Strike detection	Yes
Filter against	Flash / sun light, LED / fluorescent lamps
Beeper volumes	High (>100dBA) / Iow (75dBA) / off
Automatic shutoff	After 18min without key stroke / laser reception
Power supply	1 x AA
Battery life	>50 hours of continuous operation
Magnets	Neodymium
Protection class	IP67 (waterproof)
Physical dimensions	135mm x 69mm x 25mm
Weight without clamp	0,19kg
Operating temperature range	-10°C to +60°C
Storage temperature range	-40°C to +70°C

Structor STR-50R is compatible with almost all red rotation and line lasers. Please ask us. We'll tell you whether Structor is compatible with your laser.

Price: 199.00 (RRP exclusive of VAT. As of September 2014)

Your AndroTec-Dealer:



User-friendly: Displays front and rear

Super strong: Power Magnets



Eco-friendly and moneysaving: Requires only one AA battery!